


PRODUCT DATASHEET

Type: KST090L
Art. Nr.: 30820



Short description

Pew heater, connection left, 360W, 0.9m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	360 Watt
Mounting over cradle	✗	Max. heating power	360 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	900 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET

Type: KST100L
Art. Nr.: 30718



9120015727097

Short description

Pew heater, connection left, 400W, 1m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	400 Watt
Mounting over cradle	✗	Max. heating power	400 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1000 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET

Type: KST110L
Art. Nr.: 31082



Short description

Pew heater, connection left, 440W, 1.1m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	440 Watt
Mounting over cradle	✗	Max. heating power	440 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1100 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET


Type: KST120L
Art. Nr.: 30822



9120015727103

Short description

Pew heater, connection left, 480W, 1.2m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	480 Watt
Mounting over cradle	✗	Max. heating power	480 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1200 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET

Type: KST130L
Art. Nr.: 30823



Short description

Pew heater, connection left, 520W, 1.3m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	520 Watt
Mounting over cradle	✗	Max. heating power	520 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1300 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST140L
Art. Nr.: 30824



Short description

Pew heater, connection left, 560W, 1.4m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	560 Watt
Mounting over cradle	✗	Max. heating power	560 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1400 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST150L
Art. Nr.: 30825



Short description

Pew heater, connection left, 600W, 1.5m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	600 Watt
Mounting over cradle	✗	Max. heating power	600 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1500 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET


Type: KST080L
Art. Nr.: 30712



9120015727073

Short description

Pew heater, connection left, 320W, 0.8m, 203 V

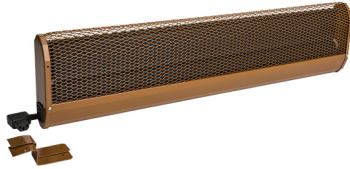

Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	320 Watt
Mounting over cradle	✗	Max. heating power	320 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	800 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST050L
Art. Nr.: 30793



Short description

Pew heater, connection left, 200W, 0.5m, 230V

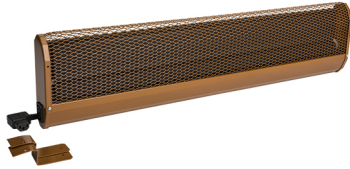

Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	200 Watt
Mounting over cradle	✗	Max. heating power	200 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	500 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST060L
Art. Nr.: 30891



Short description

Pew heater, connection left, 240W, 0.6m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	240 Watt
Mounting over cradle	✗	Max. heating power	240 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	600 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST070L
Art. Nr.: 30828



Short description

Pew heater, connection left, 280W, 0.7m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: left.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	280 Watt
Mounting over cradle	✗	Max. heating power	280 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	700 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST150R
Art. Nr.: 31022



Short description

Pew heater, connection right, 600W, 1.5m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	600 Watt
Mounting over cradle	✗	Max. heating power	600 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1500 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET


Type: KST100R
Art. Nr.: 31044



9120015726700

Short description

Pew heater, connection right, 400W, 1m, 230V

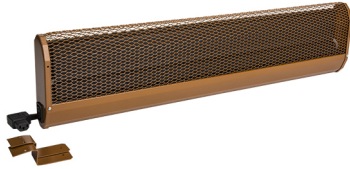

Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	400 Watt
Mounting over cradle	✗	Max. heating power	400 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1000 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST140R
Art. Nr.: 31639



Short description

Pew heater, connection right, 560W, 1.4m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	560 Watt
Mounting over cradle	✗	Max. heating power	560 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1400 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST080R
Art. Nr.: 32332



Short description

Pew heater, connection right, 320W, 0.8m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	320 Watt
Mounting over cradle	✗	Max. heating power	320 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	800 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET


Type: KST060R
Art. Nr.: 32335



9120015726595

Short description

Pew heater, connection right, 240W, 0.6m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	240 Watt
Mounting over cradle	✗	Max. heating power	240 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	600 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024

PRODUCT DATASHEET


Type: KST110R
Art. Nr.: 32334



9120015726717

Short description

Pew heater, connection right, 440W, 1.1m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating in churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	440 Watt
Mounting over cradle	✗	Max. heating power	440 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1100 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST130R
Art. Nr.: 32599



Short description

Pew heater, connection right, 520W, 1.3m, 230V

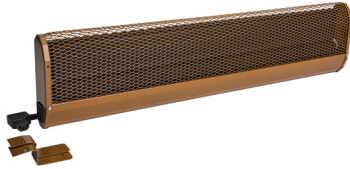

Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	520 Watt
Mounting over cradle	✗	Max. heating power	520 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1300 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST090R
Art. Nr.: 33053



Short description

Pew heater, connection right, 360W, 0.9m, 230V



Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. Special ventilation slots ensure that the heat is emitted almost exclusively to the front. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	360 Watt
Mounting over cradle	✗	Max. heating power	360 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	900 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST120R
Art. Nr.: 33530



Short description

Pew heater, connection right, 480W, 1.2m, 230V



Product Description

The KST pew heaters are dark radiators and are used for localized heating of churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	480 Watt
Mounting over cradle	✗	Max. heating power	480 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	1200 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024


PRODUCT DATASHEET

Type: KST050R
Art. Nr.: 34152



Short description

Pew heater, connection right, 200W, 0.5m, 230V

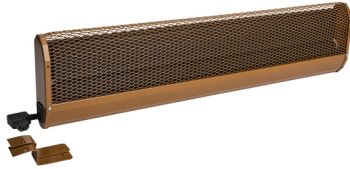

Product Description

The KST pew heaters are dark radiators and are used for local heating of churches. The heat is emitted almost exclusively to the front through special ventilation slots. Particularly suitable for churches that are only visited once a week. The electrical connection is made via appliance plugs, the factory through-wiring simplifies installation. The devices have integrated overheating protection with automatic restart, break-proof special heating element without glowing heating coil, angled plug included in the scope of delivery. Protection class: IP 21, residual current circuit breaker, test mark: ÖVE, CE compliant, galvanized sheet steel, color: fawn RAL 8007, connection: right.

ETIM characteristics

Model	Church pew heating	Voltage	230 230 Volt
Mounting method	Surface mounting	Number of heating levels	1
Power step OFF	✗	Min. heating power	200 Watt
Mounting over cradle	✗	Max. heating power	200 Watt
Degree of protection (IP)	IP21	Min. mounting height	320 Metre
Colour	Other	Max. mounting height	800 Metre
Compatible with Apple HomeKit	✗	Height	60 Millimetre
Compatible with Google Assistant	✗	Width	500 Millimetre
Compatible with Amazon Alexa	✗	Depth	185 Millimetre
IFTTT support available	✗	RAL-number	8003

Created on: 09/10/2024